

VERTICAL BACKBOARD WASHER

*Specifically designed for the ER area and EMS facilities
Consider the AQ-8000 as a vertically designed AQ-4000 model for backboards
and other EMS equipment with a small footprint.*

STANDARD FEATURES

Structural

- Stainless Steel Chamber
- Stainless Steel Structural Frame
- Stainless Steel Control Panel Enclosure
- Oscillating Stainless Steel Spray Arms
- Chamber: Rotary - Deck Floor
- Caster Wheels & Leveling Feet
- Seal Welded Wash Chamber
- Front Door - 12ga Stainless Steel
- Front Door Safety Window
- Disinfectant Application System
- Lighted Wash Chamber

Controls & Electrical

- Programmable Logic Control Syst (PLC)
- 24 Volt DC Control System
- LCD Status Display
- Level Control - Self Diagnostics
- Wash Cycle Pressure Monitoring
- Non-Reset Cycle Counter
- GFCI Built in Circuit
- 115 Volt, 30 Amp, 60 Hertz SP

Cycles

- Variable Time Cycles (3, 5, or 7 min)
- Run Mode & Drain Mode Selection
- 'Clean Only', 'Clean & Apply Disinfectant', and 'Apply Disinfectant Only' modes
- Automatic Chemical Injection
- Automatic Filling & Draining

Mechanical


- 1-1/2 HP Motor/Stainless Steel Pump

Wash System Nozzle Data

- Wash & Rinse System Nozzles: 41
- Disinfectant Nozzles: 10
- Wash PSI: 24
- Capacity Gallons/min: 57
- Capacity Gallons/cycle: 399
- Capacity Gallons/hour: 3420

Extras

- Fill & Drain Hose Set - 10' Each

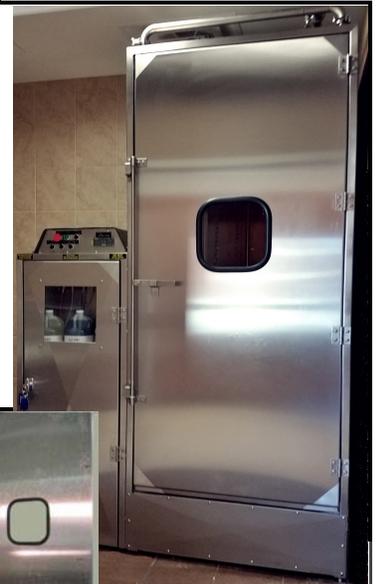

OPTIONAL FEATURES & UPGRADES

- Digital Temperature Display
- Disinfectant Application Spray Wand (Exterior Mounted)
- Wash-Down Spray Gun & Hose (Exterior Mounted)
- Back Flow Prevention Devices / System

- Water Supply Temperature Mixing Valve (1/2" or 3/4" Line Size)
- Disinfectant Mixing Station (Exterior Mounted)
- Fill Line Temperature Gauge - 3" Dial
- Specialized Cycle Sequencing

DIMENSIONS & WEIGHT

Exterior

- Length: 38-3/8"
- Width: 68-1/8"
- Height: 104-3/8"

Chamber with Floor Deck

- Length: 28-1/2"
- Width: 28-1/2"
- Height: 76-3/4"

Crate/Pallet Dimensions

- Length: 107"
- Width:
- Height:

Approximate Shipping Weight

- 1680 lbs.
- 762 Kilo

AQ-8000 Door Opening Measurements: Height: 96-3/8"

Once the Aqua Phase unit is in its location, all you need to do is hook up two hoses - one for the hot water fill line and one for the drain line. Then plug the Aqua Phase in an appropriate power source & begin saving time, improving efficiency & enhancing your infection control protocol.